




## • D5SV Series 5.0\*3.2 VCXO

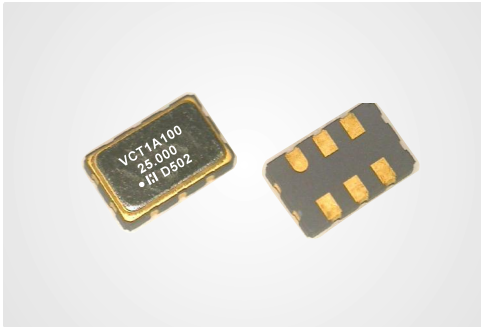




### FEATURES

- Industry Standard with 5.0\*3.2\*1.3mm package
- TTL/HCMOS output compatible
- Tri-State Enable/Disable
- Tight tolerance performance with voltage IC control
- Designed primarily for use in phase locked loops, phase shift keying and other telecommunication applications such as ADSL, set-top box, and base stations etc.

### Electrical Specifications

Parameter	Condition	D5SV	
Frequency Range*	F0	1.75~54MHz	
Frequency Calibration	At 25°C	± 15ppm	
Temperature Stability	Over T <sub>OPR</sub>	± 15ppm, ± 25ppm, ± 50ppm	
Stability vs. power change	V <sub>DD</sub> +/-5%	± 5ppm	
Stability vs. load change	15pF+/-10%	± 3ppm	
Pullability	Over Control Voltage Range	± 100ppm, ± 200ppm	± 100ppm, ± 200ppm
Control Voltage Range		0.5~4.5V	0~3.3V
Operating Temperature Range	T <sub>OPR</sub>	0°C~+70°C (-40°C~+85°C option)	
Storage Temperature Range	T <sub>STG</sub>	-55°C~+125°C	
Power Supply Voltage	V <sub>DD</sub>	5.0V+/-5%	3.3V+/-5%
Aging (First Year)	25°C ± 3°C	± 5ppm	
Supply Current	I <sub>DD</sub>	30mA Max	
Output Symmetry	Sym	At 1/2V <sub>DD</sub> 40/60%(45/55% Option)	
Rise time	T <sub>r</sub>	20%V <sub>DD</sub> ~80%V <sub>DD</sub>	8nS Max
Fall Time	T <sub>f</sub>	80%V <sub>DD</sub> ~20%V <sub>DD</sub>	8nS Max
Output Voltage	V <sub>OH</sub>	90% V <sub>DD</sub> min	
	V <sub>OL</sub>	10% V <sub>DD</sub> max	
Output Load		15pF Max	
Start-up Time	T <sub>s</sub>	10mS Max	
Packing Unit		1000pcs/reel	

### Mechanical Dimensions(mm)

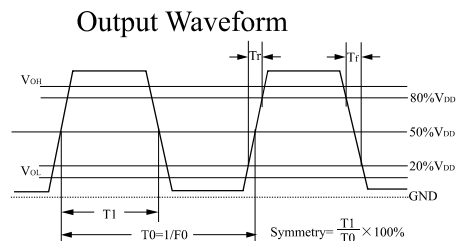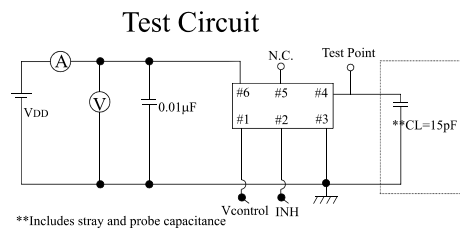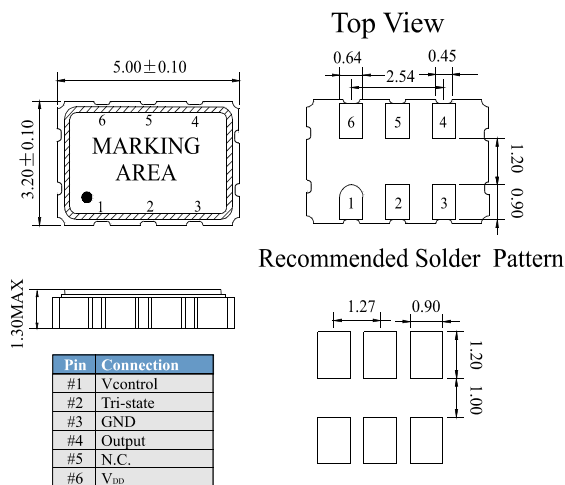

\*\*\*note: A 0.01µF bypass capacitor should be placed between V<sub>DD</sub>(Pin6) and GND(Pin3) to Minimize power supply line noise

#### TAIWAN:

HOSONIC ELECTRONIC CO., LTD.  
23-1 LANE 84. CHUN YING ST. SHULIN CHEN.  
TAIPEI 23804. TAIWAN  
WEB SITE: <http://www.hosonic.com>

☎ : 886-2-86875200  
☎ : 886-2-26816456  
✉ : [hosonic.sales@hosonic.com](mailto:hosonic.sales@hosonic.com)

#### CHINA:

HANGZHOU HOSONIC ELECTRONIC CO., LTD.  
NO.242 LIANGBO ROAD. LIANGZHU TOWN.  
YUHANG DISTRICT, HANGZHOU, ZHEJIANG, CHINA  
WEB SITE: <http://www.hosonic.com>

☎ : 86-571-88778189  
☎ : 86-571-88778857  
✉ : [hosonic.sales@hosonic.com](mailto:hosonic.sales@hosonic.com)

Specifications are subject to change without notice